


Pocket door system for use with FD30 fire doors. A larger passage width for standard UK approved 30 minute fire doors.

Finished wall thickness 100



The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.

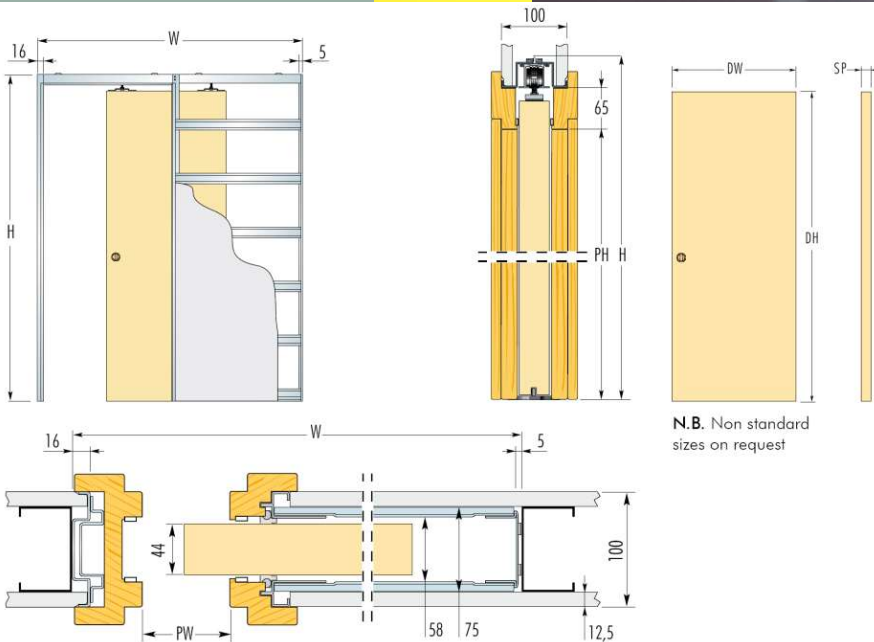

**AVAILABLE ACCESSORIES**

- Self Closing Mechanism

See accessories PDF for further details

**FURTHER INFORMATION**

0113 245 9559  
info@em-b.co.uk  
www.em-b.co.uk

www.pocketdoors.co.uk



FRAMES FOR SINGLE DOORS			DOOR PANEL UK			NOTES
Max Passage Size PW x PH	Overall Dimension W x H	Finished Wall	Standard DW	DH	SP	
570 x 2010	1288 x 2115	100	626	2040	44	Special jamb's incorporating architraves 100mm finished wall thickness.  15 x 4mm intumescent strips 12.5mm fireboard (not supplied)
670 x 2010	1488 x 2115	100	726	2040	44	
770 x 2010	1688 x 2115	100	826	2040	44	
870 x 2010	1888 x 2115	100	926	2040	44	
970 x 2010	2088 x 2115	100	1026	2040	44	
555 x 1951	1273 x 2056	100	2ft. 0in. x 6ft. 6in. (610 x 1981mm)		44	
631 x 1951	1449 x 2056	100	2ft. 3in. x 6ft. 6in. (686 x 1981mm)		44	
707 x 1951	1625 x 2056	100	2ft. 6in. x 6ft. 6in. (762 x 1981mm)		44	
783 x 1951	1701 x 2056	100	2ft. 9in. x 6ft. 6in. (838 x 1981mm)		44	
870 x 1951	1888 x 2056	100	3ft. 0in. x 6ft. 6in. (914 x 1981mm)		44	

Dimensions are given in mm