

Pocket door system for use with FD30 fire doors. A larger passage width for standard UK approved 30 minute fire doors.


Finished wall thickness 100



The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.



UNICO SD - FIRE
Frames for single fire doors

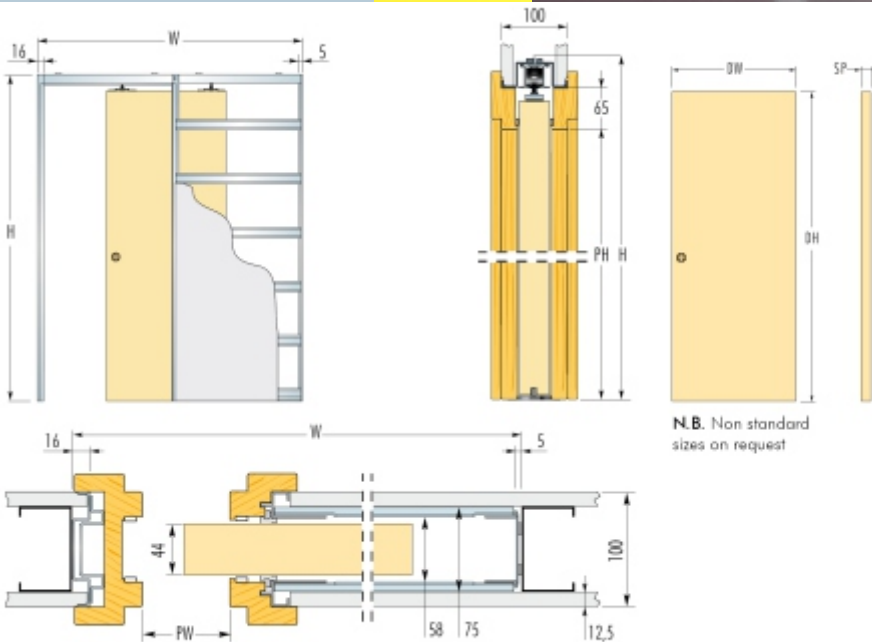

N.B. Non standard sizes on request

AVAILABLE ACCESSORIES

- Self Closing Mechanism

FURTHER INFORMATION

POCKETDOORSHOP.CO.UK
0113 245 9559
info@pocketdoors.co.uk



FRAMES FOR SINGLE DOORS

DOOR PANEL UK

NOTES

Max Passage Size PW x PH	Overall Dimension W x H	Finished Wall	Standard		
			DW	DH	SP
570 x 2010	1288 x 2115	100	626	2040	44
670 x 2010	1488 x 2115	100	726	2040	44
770 x 2010	1688 x 2115	100	826	2040	44
870 x 2010	1888 x 2115	100	926	2040	44
970 x 2010	2088 x 2115	100	1026	2040	44
555 x 1951	1273 x 2056	100	2ft. 0in. x 6ft. 6in. (610 x 1981mm)		44
631 x 1951	1449 x 2056	100	2ft. 3in. x 6ft. 6in. (686 x 1981mm)		44
707 x 1951	1625 x 2056	100	2ft. 6in. x 6ft. 6in. (762 x 1981mm)		44
783 x 1951	1701 x 2056	100	2ft. 9in. x 6ft. 6in. (838 x 1981mm)		44
870 x 1951	1888 x 2056	100	3ft. 0in. x 6ft. 6in. (914 x 1981mm)		44

Special jambs incorporating architraves

100mm finished wall thickness.

15 x 4mm intumescent strips
12.5mm fireboard (not supplied)

Doors and plasterboard are **NOT** supplied

Dimensions are given in mm